




Active Infrared Door Sensor

OA-203C



Safety ^{Reliable} **Infinity presence** **Sensitivity**
Environmental immunity **detection** ^{DESIGN}
Easy installation **QUALITY**

The Optex OA-203C is the optimal choice for both safety and activation on all types of automatic doors. It combines easily adjustable settings with a slim design, providing maximum safety in a wide array of applications.

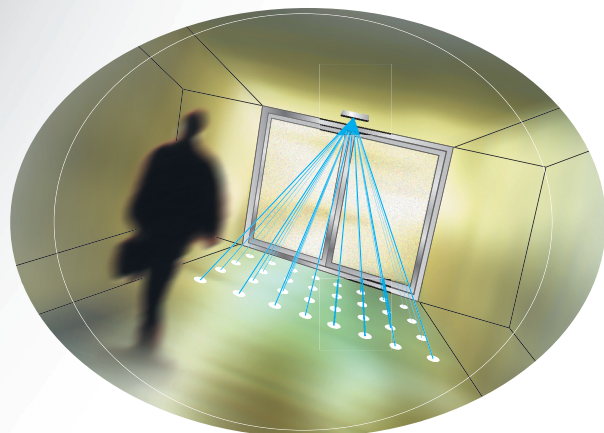

Easy installation

The Optex OA-203C is simple to install. All the settings are mechanically adjustable with dipswitch and levers.

Safety

Safety is assured by the two rows of presence detection closest to the door. The sensor detects a person or object and holds the door open as long as they are in the threshold area, even if they stop or pause.

Design

A very compact and slim design, available in three colors: Black, Silver and White.

All conditions

Snow mode and variable sensitivity adjustments make this sensor suitable for every application and even extreme weather conditions.

Quality

Optex automatic door sensors guarantee premium performance and include a 3-year full replacement warranty.

OA-203CS



OA-203CBL




Active Infrared Door Sensor

Specifications

Model	OA-203C
Mounting Height	max. 3.0 m. (9'10")
Detection Area Adjustments	Eliminate rows C, D, or E (dipswitch setting) Depth 3.5" in or out Width 7" left or right Shutters eliminate left and right sides
Detection Technique	Active Infrared (Near Infrared Reflection)
Power Supply	12 to 24V AC/DC
Current Draw	100mA max.
Power/Operating Indicator	Green LED ON: Standby Red LED ON: Presence detection Orange LED ON: Motion detection
Output Contact	Form C Relay 50V, 0.3A (Resistance Load)
Relay Hold Time	Approx. 0.5 sec
Operating Temperature	-20°C – +55°C (-4°F – +131°F)
Outer Dimensions	8 3/4" x 2 1/2" x 1 1/4" inch (w x h x d) (221 x 63 x 29.9 mm)
Weight	6.5 oz (185g)
Accessories	2 m Connection Cable with Plug 2 Mounting Screws Mounting Template Area Adjustment Tool
Available Colors	Silver (OA-203CS), Black (OA-203CBL) and White (OA-203CW)

Detection area chart

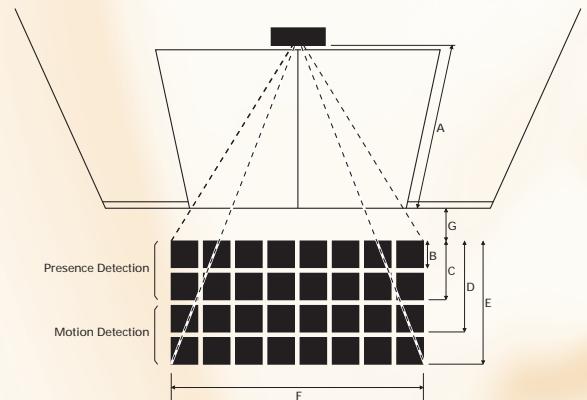

Mounting Height A	7'3" (2.20 m)	8'2" (2.50 m)	8'10" (2.70 m)	9'10" (3.00 m)
Area Depth B (presence detection)	3" (0.08 m)	4" (0.09 m)	4" (0.09 m)	4" (0.1 m)
Area Depth C (presence detection)	1'3" (0.37 m)	1'5" (0.42 m)	1'6" (0.45 m)	1'8" (0.5 m)
Area Depth D (presence and motion detection)	2'7" (0.78 m)	2'11" (0.89 m)	3'2" (0.96 m)	3'6" (1.07 m)
Area Depth E (presence and motion detection)	4'4" (1.31 m)	4'11" (1.49 m)	5'3" (1.61 m)	5'10" (1.79 m)
Area Width F	7'7" (2.3 m)	8'6" (2.6 m)	9'2" (2.8 m)	10'2" (3.1 m)
Distance to mounting surface G	2" (0.04 m)	2" (0.04 m)	2" (0.04 m)	2" (0.04 m)

OPTEX
TECHNOLOGIES, INC.

3882 Del Amo Blvd., Suite 604
Torrance, CA 90503 USA
TEL: 310-214-8644
FAX: 310-214-8655
TOLL-FREE: 800-877-6656
E-MAIL: sales@ot-inc.com
WEBSITE: www.ot-inc.com

